

FaceStation 2

Smart Face Recognition Terminal





FaceStation 2


Suprema FaceStation 2 is the most advanced face recognition terminal providing loads of the world's best features. Powered by Suprema's latest innovation in facial biometrics, FaceStation 2 offers unrivalled matching speed, accuracy and level of security. With Suprema's patented optic engineering, FaceStation 2 achieves up to 25,000 lx of operating illuminance which in turn, brings all-round confidence regardless of lighting conditions. Packed in an ergonomically-designed structure, FaceStation 2 provides exceptional performance and usability for diverse access control and time attendance sites, large or small.


FaceStation 2 Smart Face Recognition Terminal


Features

- 
Ultra Performance
 - Matching Speed: 1:3,000 match/sec
 - * Group Matching: 1:5,000 match/sec
 - User Capacity: Max 30,000 users (1:1), 3,000 users (1:N)

- 
Highest Operating Illuminance
 - Operating illuminance from 0 lx to 25,000 lx
 - Highest operating illuminance available
 - Covers complete darkness to all indoor lighting conditions

- 
Enhanced Security
 - Live face detection: IR-based image analysis to prevent spoofing by printed images and LCDs
 - Enhanced security by Android 5.0 Lollipop
 - High quality Image log

- 
Multi RFID Card Reading
 - LF(125KHz), HF(13.56MHz) dual-band
 - Reads all card types that HID multiCLASS supports (EM/HID Prox/MIFARE/iCLASS/DESFire/FeliCa/NFC)


- 
Ergonomics & User Convenience
 - Extended height range: 145cm – 210cm
 - Tilt-type bracket for wheelchair persons & children
 - Android 5.0 Lollipop based intuitive GUI
 - Improved face enrolment procedure

Specifications


Category	Features	F52-D	F52-AWB
Credential	Biometric	Face	
	RF Options	125kHz: EM 13.56Mhz: MIFARE, MIFARE Plus, DESFire/EV1, FeliCa, NFC	(Includes all F52-D's RF types) 125kHz:HID Prox 13.56Mhz: iCLASS SE/SR 2.4GHz: BLE
	RF read range*	MIFARE/DESFire/iCLASS : 50 mm EM/HID Prox / FeliCa: 30 mm, BLE: 50 mm	
General	CPU	1.4 GHz Quad Core	
	Memory	8GB Flash + 1GB RAM	
	LCD type	4" color TFT LCD	
	LCD resolution	800 x 480 pixels	
	IR LED	140 ea	
	Sound	24 bit Voice DSP (echo cancellation)	
	Operating temperature	-20°C ~ 50°C	
	Operating humidity	0% ~ 80%, non-condensing	
	Dimensions (W x H x D)	141 mm x 164 mm x 125 mm	
	Weight	Device: 548g, Bracket: 74g (incl. washer and bolt)	
Face	Certificates	CE, FCC, KC, RoHS, REACH, WEEE, BT SIG	
	Power	DC 12V 2.5 A	
Capacity	Image dimension	720 x 480 pixels	
	Live Face Detection	Supported	
Capacity	Max. User	30,000 (1:1), 3,000(1:N)	
	Max. Log	5,000,000 (text), 50,000 (image)	
Interfaces	Wi-Fi	IEEE 802.11 b/g (F52-AWB only)	
	Ethernet	Supported (10/100/1000 Mbps, auto MDI/MDI-X)	
	RS-485	1ch Host or Slave (Selectable)	
	Wiegand	1ch Input, 1ch Output	
	TTL input	1ch Input	
	Relay	1 Relay	
	USB	USB 2.0 (Host)	
	Tamper	Supported	
Video Phone	SIP-based VoIP (Video + Voice)		

System Configurations

• Standalone

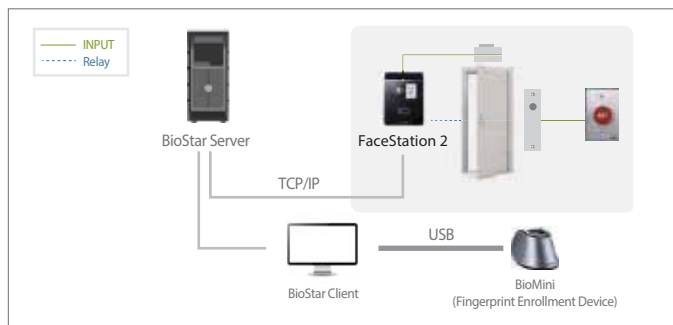

• Standalone-Secure

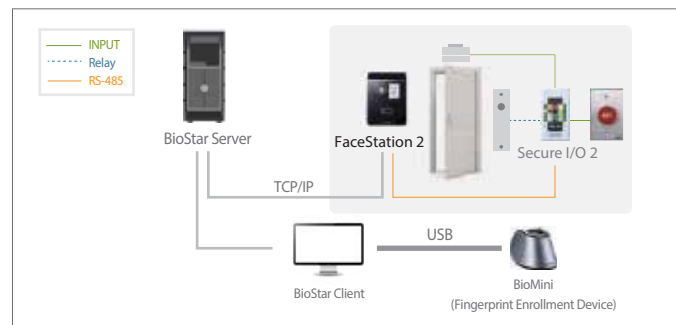

• Distributed Access Control Systems



BioConnect is dedicated to helping you successfully promote and install the Suprema product line. Visit www.bioconnect.com/Suprema.

Tel: 1-855-368-3743 | Email: sales@bioconnect.com



©2017 Suprema Inc. Suprema and identifying product names and numbers herein are registered trademarks of Suprema, Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.

©2017 Entertech Systems Inc. O/A BioConnect. Suprema Hardware Distributed Exclusively by Entertech Systems Inc. Entertech Systems Inc. is the Official Operating Partner of Suprema In the US, Canada, and Puerto Rico.

[AHL-FST2-170401-01EN]